

932

TARGET SIMULATION

Vehicle Radar Traffic Simulator



This product is a compact purpose designed portable radar target simulator that can be used to test radars on site for correct operation and speed reporting.

- Verification of corret radar operation
- Speed reporting
- Technically advanced radar platform
- User adjustable perameters



OPTIONAL FIELD TEST TARGET SIMULATOR




FEATURES

- Lightweight ergonomic profile
- Ease of set up in road side environment
- Intuitive user Interface
- User selectable pre-set speed values
- User definable specific speed values

DIMENSIONS:

Weight: 800g

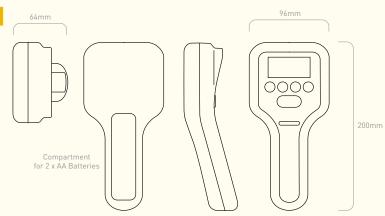

SPECIFICATIONS

Frequency	K-Band 24GHz
Simulation Range	20-320 Km/hr
Operating Time	10 hours continuous use
Operating Distance	Min 1m - Max 2m
Mounting	Flange fixings or tripod mount
Mounting Height	1 - 3.5m nominal
Housing Material	Polycarbonate
Sealing	IP52
Operating Temp	-20° C to +50° C
Power	40mA (120mA Transmit)
Power Supply	2.2V - 3.6V (2 x AA Batteries)
Approved to:	BS EN 50293



342 TESTING PROCESS



EQUIPMENT:

HYPERION

MAGD

PRODUCT TEST:

TEST FUNCTION:

True range simulation of target
Radar target processing optimisation
Verification of communication protocols

Hyperion™ is a bespoke set of test equipment designed and developed by AGD Systems. It is dedicated to the testing of the AGD portfolio of 'ranging' FMCW vehicle radars. 100% of the 342 units manufactured at AGD are Certified by Hyperion.



LIFETIME PRODUCT TRACEABILITY

There are clearly defined pass and fail criteria at all stages within the Hyperion test process. The test results in association with the product build revision are recorded on a product serial number basis. The full suite of test measurements is instantly sent to the dedicated product database within the AGD secure server facility, providing full traceability during the product lifetime.

The AGD Certified symbol is your mark of assured performance.

AGD CERTIFIED INTELLIGENT DETECTION SYSTEM

The key test functions performed by Hyperion to Certify the premium performance of your Intelligent Detection System are:

- True range simulation of target
- Target speed and direction simulation at a given range
- Radar target processing optimisation
- Transmitted radar frequency modulation measurement
- Verification of interface and communication protocols
- Test cycle time of 9 minutes

The radar test sequences performed by Hyperion on the radar under test provides a thorough examination of the performance of the 342 radar and specifically the ranging measurement capability provided by the FMCW technology deployed. This gives full control of simulated targets' signal size, speed, direction and range.

Optimisation of frequency signals on Hyperion ensures full compatibility with country requirements within the 24GHz radar operating band.

AGD Systems Limited

White Lion House, Gloucester Road Staverton, Cheltenham Gloucestershire, GL51 0TF, UK

